


# 7-Day Programmable or Manual Touchscreen Digital Thermostat

PurePro®

DP721UT

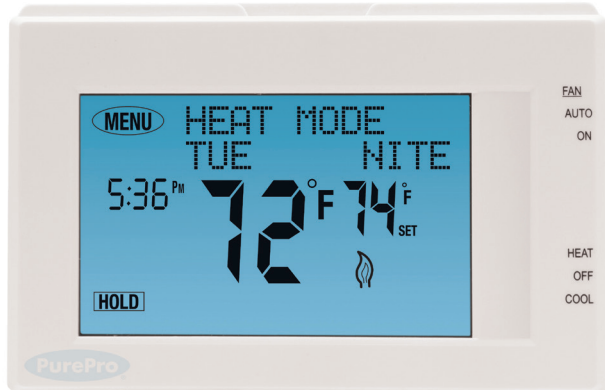

*Easy-to-use with programmable keyboard lock.  
Each day can be programmed differently  
(2 or 4 periods/day).*

## 7-Day Programmable or Manual Touchscreen Digital Heating and Cooling Thermostat

### DP721UT is universally compatible with:

- Conventional heat & A/C
- Heat pumps with up to 2-heat/1-cool (including AUX/EMERG heat)
- 2 and 3-wire hydronic systems (hot water baseboard & radiator)
- Gas Millivolt heaters (wall heaters/furnaces & gas fireplaces)

### Features:

- Easy-to-read backlit digital display
- Selectable 2 or 4 periods per day
- Adjust heating and cooling limits
- Keyboard lock
- Programmable air filter monitor
- System or battery powered, 2AA batteries included
- User selectable programmable or non-programmable
- Manual temperature hold
- Temporary temperature override
- 5/2 minute selectable time delay
- Battery free memory storage
- 3 year warranty
- Optional wall plate available
- Smart Recovery

### Dimensions:

5.375" W x 3.375" H x 1.125" D

### Mounted:

Horizontal

### Heat/Cool Terminals:

G, B, O, Y, RC, RH, W2, A, W1, C  
(solid pins for 24V and Millivolt systems)

### Ratings:

- 1.5 Amps per terminal at 24 volts
- Temp control: 45°F to 90°F

### Not for use with:


Line voltage systems (120/240 VAC)

# 7-Day Programmable Thermostat

DP711



*Easy-to-read backlit digital display.*

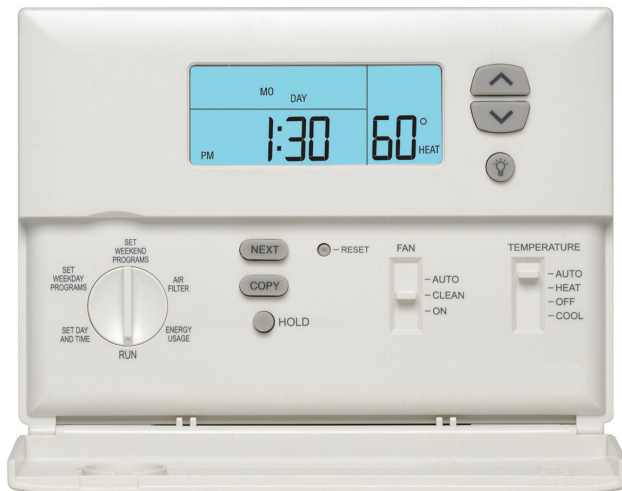

*7-day programming with 4 periods per day.*

## 7-Day Programmable Heating and Cooling Thermostat

### DP711 is compatible with:

- 1-heat / 1-cool
- Air conditioning systems, gas, oil, or electric heating systems, low voltage (24V) systems
- 2-wire hydronic systems

### Features:

- Fully programmable
- Programmable auto changeover
- Intermittent fan
- 7-day programming – 4 periods per day
- System or battery powered with battery free memory storage, 2AA batteries included
- Programmable filter timer with change filter indicator
- Vacation override
- Adjustable 2 or 5 minute A/C compressor delay
- Easy-to-read backlit digital display
- Adjustable temperature differential / Cycle rate (.25 – 2.25)
- Programming copy button
- Keyboard lockout
- On-screen low battery indicator
- 3 year warranty
- Optional wall plate available

### Dimensions:

5.90" W x 4.13" H x 1.18" D

### Mounted:

Horizontal

### Heat/Cool terminals:

RH, RC, O, B, W, Y, G, C

### Ratings:

- 1.5 Amps at each terminal, 2 Amps total 24V AC
- Temp control: 45° F to 90° F

### Not for use with:

- Multi-stage heat pumps
- Multi-stage gas, oil or electric furnaces
- 3-wire hydronic systems
- Line voltage systems (without transformer)