



NPT shown here.

Full Port Brass Ball Valve

The PurePro® forged brass ball valves combine reliable operation with maximum economy. Ideal for general flow control applications including HVAC, fuel gases, and fire protection trim and drain, etc. Valves include most pertinent agency approvals.



Features

- Full-Port
- Blow-out Proof Stem Design
- Adjustable Stem Packing Nut
- Silicone Free
- 100% Factory Tested

Performance rating

- Valve Design Rating: 600 CWP
- Temperature range: -0°F to 400°F

Do not use on Steam.

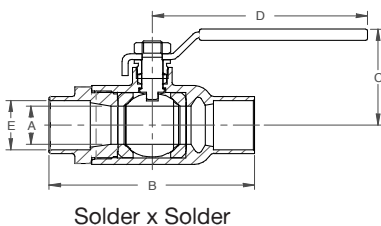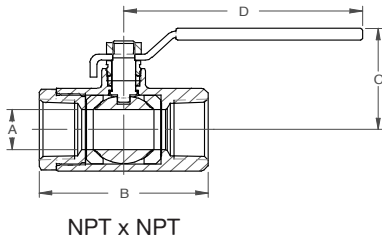

Specifications

Full-Port Brass Ball Valve Mfr #	Size	Dimensions (in.)					Weight (lbs.)
		A	B	C	D	E	
NPT							
PROT101-14	1/4"	0.395	1.746	1.840	3.543	-	0.33
PROT102-38	3/8"	0.407	1.756	1.840	3.543	-	0.30
PROT103-12	1/2"	0.583	2.047	1.921	3.543	-	0.44
PROT104-34	3/4"	0.748	2.362	2.087	3.780	-	0.66
PROT105-1	1"	0.945	2.756	2.559	4.528	-	1.10
PROT106-114	1-1/4"	1.260	3.307	2.953	4.528	-	1.57
PROT107-112	1-1/2"	1.575	3.661	3.346	5.512	-	2.40
PROT108-2	2"	1.969	4.181	3.681	5.512	-	3.37
SOLDER							
PROC203-12	1/2"	0.583	2.047	1.839	3.543	0.630	0.38
PROC204-34	3/4"	0.748	2.748	1.996	3.780	0.878	0.64
PROC205-1	1"	0.945	3.228	2.441	4.528	1.130	0.99
PROC206-114	1-1/4"	1.260	3.819	2.854	4.528	1.378	1.40
PROC207-112	1-1/2"	1.575	4.425	3.169	5.512	1.630	2.17
PROC208-2	2"	1.969	5.315	3.449	5.512	2.130	2.97