


# Manual Digital Thermostat

D210

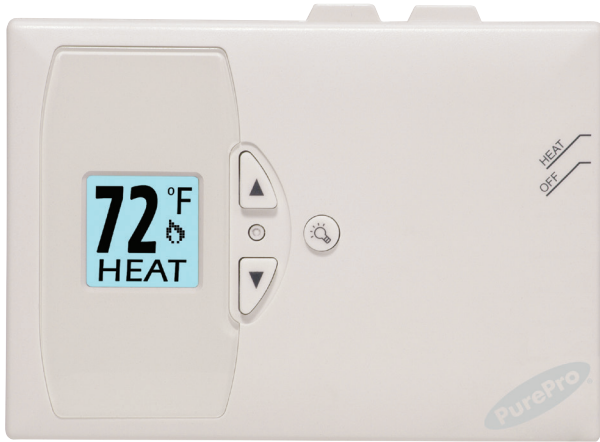

*Easy-to-install.  
Easy-to-read backlit digital display.*

## Manual Digital Heating Thermostat

### D210 is compatible with:

- 1-heat only: 2-wire gas, oil, and electric heating systems
- 2-wire hydronic systems
- Hydronic air handling systems
- 24v and Millivolt controls

### Features:

- Easy-to-install thermostat
- Easy-to-read backlit digital display
- System or battery powered, 2 AA batteries included
- Low battery indicator
- 3 year warranty
- Optional wall plate available

### Dimensions:

4.625" W x 3.25" H x .875" D

### Mounted:

Horizontal or vertical

### Ratings:


- 1.5 AMPS per terminal at 24 volts
- Temperature control: 45° to 90°F

### Not for use with:

- Cooling systems
- Heat pump systems
- Multistage gas or oil furnaces
- 3 wire hydronic systems
- Line voltage systems (120/240 VAC)

# Manual Digital Thermostat

D111

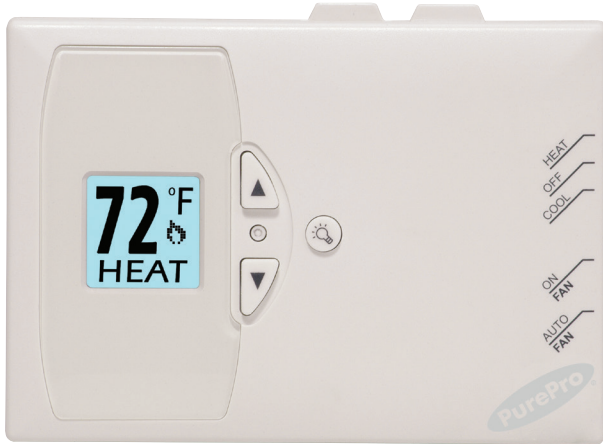

*Easy-to-install.  
Manual control for heating and cooling.*

## Manual Digital Heating and Cooling Thermostat

### D111 is compatible with:

- Most 24V heating and A/C systems
- 1-heat/1-cool: gas, oil, electric or single stage heat pump system
- 2-wire hydronic systems (hot water baseboard and radiator)
- Millivolt systems (wall heaters/furnaces & gas fireplaces)

### Features:

- Easy-to-install thermostat
- Manual control for heat and cooling
- Easy-to-read backlit digital display
- Keypad lock for unauthorized use
- Temperature swing adjustment to as close as + or - 1/4° F/C
- 5-minute or 2-minute compressor delay
- Universal replacement
- System or battery powered, includes 2 AA batteries
- Low battery indicator
- 3 year warranty
- Optional wall plate available

### Dimensions:

5.375" W x 3.375" H x 1.25" D

### Mounted:

Horizontal or vertical

### Heat/Cool Terminals:

G, Y, W, RH, RC

### Ratings:

- 1.5 AMPS per terminal at 24 volts
- Temp control: 45°F to 90°F

### Not for use with:

- Multi-stage heating & AC systems
- Multi-stage heat pumps
- 3-wire hydronic zone valve systems
- Line voltage systems (120/240 VAC)